
KYOTO 260 **0386** sku 1060001

astro





PRODUCT SPECIFICATION

GENERAL

| FINISH: | Polished Chrome | CABLE LENGTH: | Not Applicable |
|---------------------------|--------------------------|----------------------------|---|
| MAIN MATERIAL: | Metal - Zinc | GROSS WEIGHT: | 1.375 (kg) |
| DIMENSIONS: | H: 260mm W: 55mm D: 87mm | CLASS: | CE (Class II) |
| INSTALLATION ORIENTATION: | Wall Mount - Vertical | IP RATING: | IP44 |
| CUT OUT HOLE: | Not Applicable | BATHROOM ZONE: | Zone 2, 3 |
| RECESS DEPTH: | Not Applicable | VOLTAGE: | Mains 230V |
| FIRE RATING: | Not Applicable | PRODUCT F MARK: | Suitable for mounting on flammable materia |
| LAMP | | | |
| LIGHT SOURCE: | 2G7 | MACADAM ELIPSE: | Not Applicable |
| MAXIMUM WATTAGE: | 11W | UGR: | Not Applicable |
| MAXIMUM LAMP LENGTH: | Not Applicable | BEAM ANGLE: | Not Applicable |
| LAMP INCLUDED? | No | TILT ADJUSTMENT ANGLE: | Not Applicable |
| LUMINOUS FLUX: | 598.2 (lm) | ROTATION ADJUSTMENT ANGLE: | Not Applicable |
| COLOUR TEMP: | Lamp Dependent | AVERAGE LIFESPAN: | 20,000 (Hrs) |
| CRI: | Lamp Dependent | L70: | Not Applicable |
| R9: | -13.4 | | |
| ELECTRICAL | | | |
| SWITCHED: | No | SUPPLY FREQUENCY: | 50/60 (Hz) |
| DIMMABLE: | No | DRIVER/BALLAST VOLTAGE: | 220-240 (V) |
| DIMMING METHOD: | Not Applicable | DRIVER AVERAGE LIFESPAN: | Not Applicable |
| DRIVER OUTPUT CURRENT: | Not Applicable | EFFICACY: | 51.35 (lm/W) |
| DRIVER OUTPUT VOLTAGE: | Not Applicable | DRIVER / BALLAST INCLUDED? | Yes (Integral) |
| | | | |

ADDITIONAL INFORMATION




This product is not suitable for use with a PIR motion detector.



BOX QUANTITY X12

Œ

PRODUCT ELEVATIONS

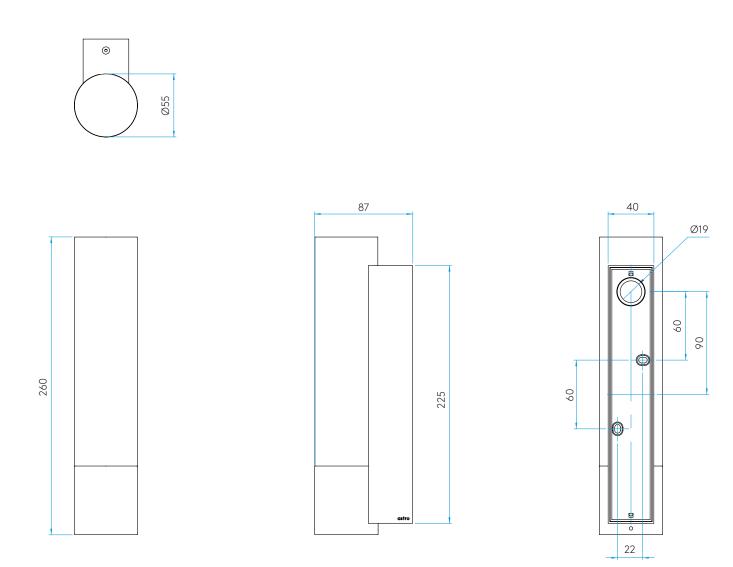

Astro Lighting Ltd. G2 River Way, Harlow, CM20 2DP, Great Britain T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.co.uk www.astrolighting.co.uk