TARO ADJ FIRE RESISTANT **5676** sku 1240028




PRODUCT SPECIFICATION

GENERAL

FINISH:	White	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Mild Steel	GROSS WEIGHT:	0.48 (kg)
DIMENSIONS:	D:147mm DIA:100mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Ceiling Mount	IP RATING:	IP20
CUT OUT HOLE:	86mm/3-3/8″	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	167mm/6.58″	VOLTAGE:	Mains 230 (V)
FIRE RATING:	90 min	PRODUCT F MARK:	Not suitable for mounting on flammable materials. Not suitable for covering with thermal insulation.
LAMP			
LIGHT SOURCE:	GU10	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	50W Max	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	57mm/2.24"	BEAM ANGLE:	Lamp Dependant
LAMP INCLUDED?	No	TILT ADJUSTMENT ANGLE:	35 (Degrees)
LUMINOUS FLUX:	Lamp Dependant	ROTATION ADJUSTMENT ANGLE:	360 (Degrees)
COLOUR TEMP:	Lamp Dependant	AVERAGE LIFESPAN:	Lamp Dependant
CRI:	Lamp Dependant	L70:	Not Applicable
R9:	Lamp Dependant		
ELECTRICAL			
SWITCHED:	No	SUPPLY FREQUENCY:	Not Applicable
DIMMABLE:	Yes	DRIVER / BALLAST VOLTAGE:	Not Applicable
DIMMING METHOD:	Lamp Dependant	DRIVER AVERAGE LIFESPAN:	Not Applicable
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	Lamp Dependant
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER/BALLAST INCLUDED?	Not Applicable
ADDITIONAL INFORI			(

BOX QUANTITY X24

PRODUCT ELEVATIONS

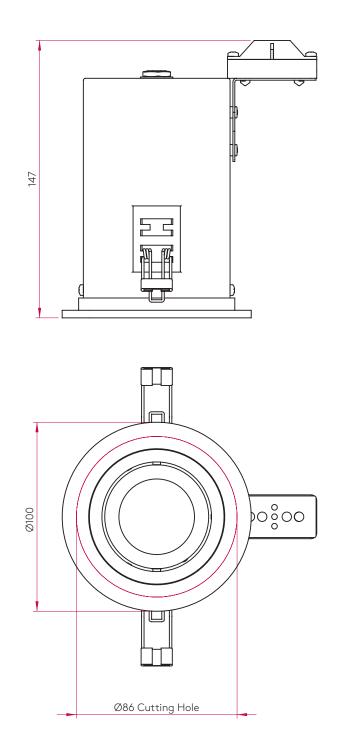

Astro Lighting Ltd. G2 River Way, Harlow, CM20 2DP, Great Britain T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com