APRILIA TWIN ADJUSTABLE **5688** SKU 1256001



PRODUCT SPECIFICATION

GENERAL

FINISH: White **GROSS WEIGHT:** 1.39 (lbs) MAIN MATERIAL: Metal - Aluminium CLASS: cETLus (Class 2) DIMENSIONS: H: 95mm W: 180mm D: 69mm LISTING LOCATION: Dry H: 3.74" W: 7.09" D: 2.72" FITTING METHOD: Recessed in Drywall Ceiling ADA COMPLIANT: Yes INSTALLATION ORIENTATION: Ceiling Mount H: 165mm/6.5" W: 85mm/3.35" IC RATING: Non IC Rated CUT OUT HOLE: RECESS DEPTH: VOLTAGE: 150mm/5.9" Constant Current 350 (mA) FIRE RATING: Not Applicable CABLE LENGTH: Not Applicable LAMP LIGHT SOURCE: COB LED MACADAM ELIPSE: 3-Step MAXIMUM WATTAGE: 2 x 7W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable BEAM ANGLE: 36.1 (Degrees) TILT ADJUSTMENT ANGLE: LAMP INCLUDED? Yes (Integral) 35 (Degrees) **DELIVERED LUMENS:** 976.3 (lm) ROTATION ADJUSTMENT ANGLE: 360 (Degrees) COLOR TEMP: AVERAGE LIFESPAN: 3000 (K) 50,000 (Hrs) CRI: 80 L70: To Be Advised R9: 18 **ELECTRICAL** SWITCHED: SUPPLY FREQUENCY: No Not Applicable DIMMABLE: Yes DRIVER / BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable DRIVER OUTPUT CURRENT: Not Applicable EFFICACY: 76 (lm/w)

ADDITIONAL INFORMATION

Not Applicable

DRIVER OUTPUT VOLTAGE:




No


DRIVER/BALLAST INCLUDED?

(EII)


PRODUCT ELEVATIONS



mm



69mm/2.72"

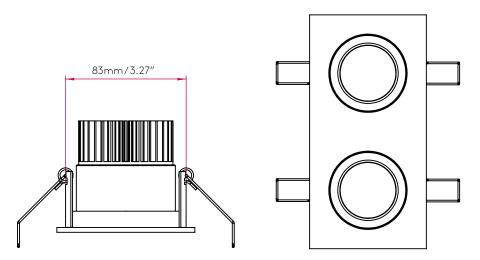

T: +1 732-428 5551

E: ctedesco@astrolighting.com