


EDGE READER SINGLE SWITCH 7959

SKU 1352008

astro

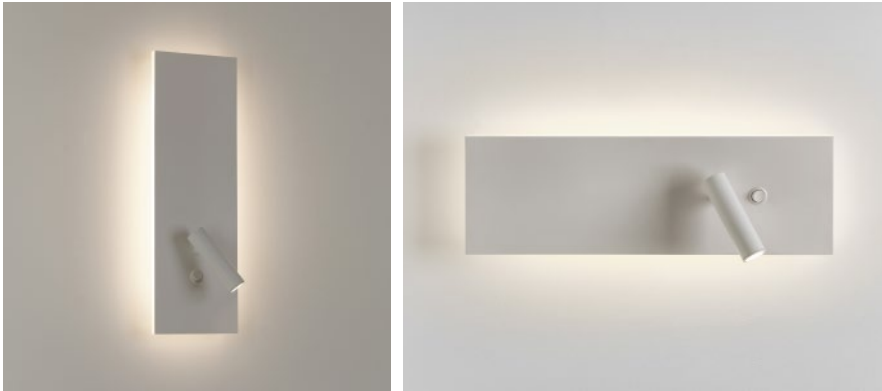

PRODUCT SPECIFICATION

GENERAL

FINISH:	White	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Mild Steel	GROSS WEIGHT:	3.34 (Kg)
DIMENSIONS:	H: 450mm W: 150mm D: 95mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Horizontal/Vertical	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230v
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials

MAIN LAMP

LIGHT SOURCE:	LED Strip	R9:	10.6
MAXIMUM WATTAGE:	15.7W	MACADAM ELIPSE:	+/- 100K
LAMP INCLUDED?	Yes (Integral)	UGR:	Not Applicable
LUMINOUS FLUX:	547.52 (lm)	BEAM ANGLE:	Not Applicable
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	Not Applicable
CRI:	80	L70:	To Be Advised

ADDITIONAL LAMP

LIGHT SOURCE:	High Power LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	4.07W	UGR:	To Be Advised
LAMP INCLUDED?	Yes (Integral)	BEAM ANGLE:	To Be Advised
LUMINOUS FLUX:	120.27 (lm)	TILT ADJUSTMENT ANGLE:	90 (Degrees)
COLOUR TEMP:	2700 (K)	ROTATION ADJUSTMENT ANGLE:	330 (Degrees)
CRI:	80	AVERAGE LIFESPAN:	60,000 (Hrs)
R9:	10.7	L70:	To Be Advised

ELECTRICAL - MAIN LAMP


SWITCHED:	Yes	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER / BALLAST VOLTAGE:	100-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	30000 (Hrs)
DRIVER OUTPUT CURRENT:	Not Applicable	MAIN LAMP EFFICACY:	34.87 (lm/W)
DRIVER OUTPUT VOLTAGE:	12 (mA)	DRIVER / BALLAST INCLUDED?	Yes (Integral)

ELECTRICAL - ADDITIONAL LAMP


DRIVER OUTPUT CURRENT:	700 (mA)	DRIVER AVERAGE LIFESPAN:	30000 (Hrs)
DRIVER OUTPUT VOLTAGE:	Not Applicable	ADDITIONAL LAMP EFFICACY:	29.55 (lm/W)
SUPPLY FREQUENCY:	50/60 (Hz)	DRIVER / BALLAST INCLUDED?	Yes (Integral)
DRIVER / BALLAST VOLTAGE:	Not Applicable		

PRODUCT ELEVATIONS


TOP

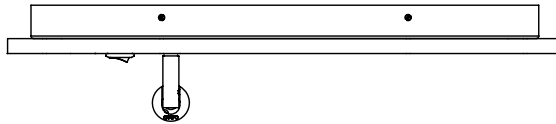


FRONT

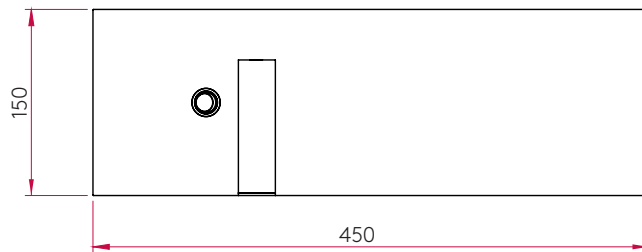


SIDE

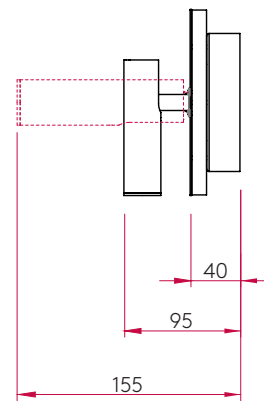

BACK

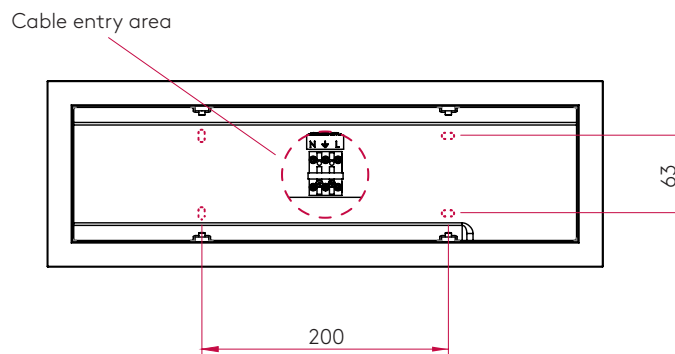

ADDITIONAL INFORMATION



BOX QUANTITY X 4