MONDRIAN 300 WALL 7888 SKU 1374005



PRODUCT SPECIFICATION

GENERAL

FINISH: Bronze Plated CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Aluminium GROSS WEIGHT: 0.68 (Kg) H: 50mm W: 300mm D: 183mm DIMENSIONS: CLASS: CE (Class I) INSTALLATION ORIENTATION: Wall Mount - Horizontal **IP RATING:** IP20 Not Applicable CUT OUT HOLE: BATHROOM ZONE: Zone 3 **RECESS DEPTH:** Not Applicable VOLTAGE: Mains 230V FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials LAMP LIGHT SOURCE: LED Strip MACADAM ELIPSE: +/-100K MAXIMUM WATTAGE: 5.1W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** To Be Advised LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: 40 (Degrees) LUMINOUS FLUX: 111.67 (lm) ROTATION ADJUSTMENT ANGLE: Not Applicable COLOUR TEMP: AVERAGE LIFESPAN: 2700 (K) Not Applicable CRI: 80 L70: To Be Advised R9: -1.0 **ELECTRICAL** SWITCHED: SUPPLY FREQUENCY: No 50/60 (Hz) DIMMABLE: No DRIVER / BALLAST VOLTAGE: 100 - 240 (V) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: 30000 (Hrs) DRIVER OUTPUT CURRENT: Not Applicable EFFICACY: 21.9 (Im/W) DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED? 12 (V) Yes (Integral) CE


ADDITIONAL INFORMATION


Product tested with 1836 - LED Driver CC 250/350/500/700mA DALI Dim




BOX QUANTITY x 6

PRODUCT ELEVATIONS






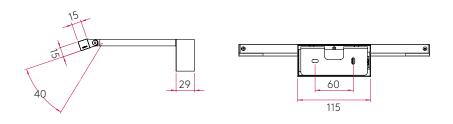

www.astrolighting.com

LUX DISTRIBUTION DIAGRAM

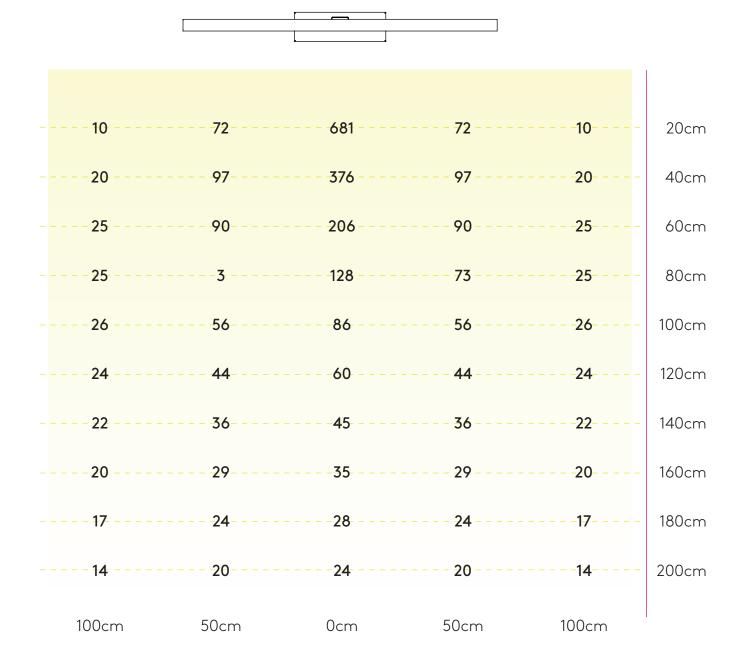

ADDITIONAL INFORMATION

CE

All products tested were mounted 2m from the floor and adjustable heads set perpendicular to the ground. Results were obtained using a handheld lumen meter, measurements given are in Lux. Please note: Graphical representation of the product is not to scale.