APRILIA TWIN ADJUSTABLE 5757 SKU 1256022



PRODUCT SPECIFICATION

GENERAL


FINISH:	Matt White	CABLE LENGTH:	450 (mm)
MAIN MATERIAL:	Metal - Aluminium	GROSS WEIGHT:	0.50 (Kg)
DIMENSIONS:	H:180mm W:95mm D:69mm	CLASS:	CE (Class III)
INSTALLATION ORIENTATION:	Ceiling Mount	IP RATING:	IP20
CUT OUT HOLE:	L:165mm W:85mm	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Constant Current 350 (mA
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable materials
LAMP			
LIGHT SOURCE:	COB LED	MACADAM ELLIPSE:	3-Step
MAXIMUM WATTAGE:	2 x 6.1W	UGR:	To Be Advised
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	36.1 (Degrees)
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	35 (Degrees)
LUMINOUS FLUX:	1122.5 (lm)	ROTATION ADJUSTMENT ANGLE:	360 (Degrees)
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	36,300 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	7.0		
ELECTRICAL			
SWITCHED:	No	SUPPLY FREQUENCY:	Not Applicable
DIMMABLE:	Yes	DRIVER/BALLAST VOLTAGE:	Not Applicable
DIMMING METHOD:	Control Gear Dependant	DRIVER AVERAGE LIFESPAN:	Not Applicable
DRIVER OUTPUT CURRENT:	Not Applicable	EFFICACY:	90.52 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER/BALLAST INCLUDED?	No
ADDITIONAL INFORI	MATION		CF

ADDITIONAL INFORMATION





BOX QUANTITY x 20

PRODUCT ELEVATIONS

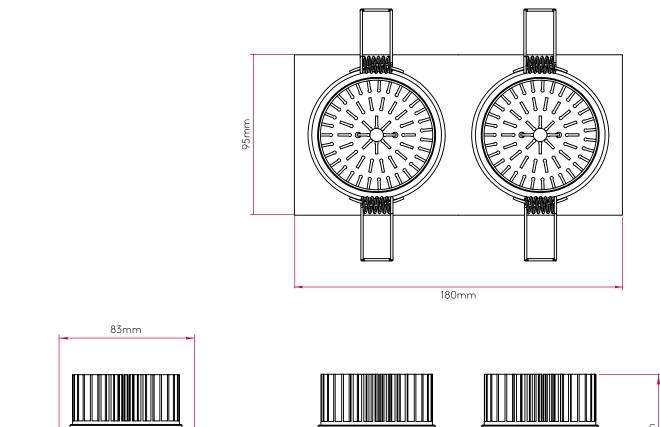



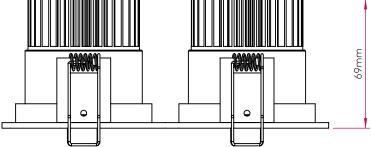

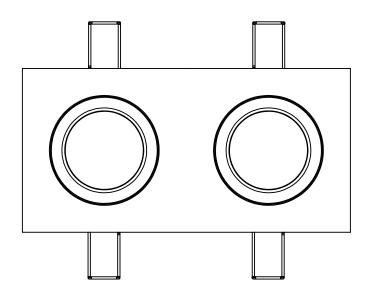

T: +44 (0) 1279 427001

sales@astrolighting.com

www.astrolighting.com