TARO ROUND FIRE-RATED **5672** SKU 1240024

astro



PRODUCT SPECIFICATION

GENERAL

Matt White FINISH: CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Mild Steel **GROSS WEIGHT:** 0.47 (Kg) **DIMENSIONS:** H: 152mm DIA: 100mm CE (Class I) CLASS: Ceiling Mount IP20 INSTALLATION ORIENTATION: IP RATING:

CUT OUT HOLE: 86mm/3-3/8" BATHROOM ZONE: Zone 3

RECESS DEPTH: 172 (mm) VOLTAGE: Mains 2:

RECESS DEPTH: 172 (mm) VOLTAGE: Mains 230 (V)
FIRE RATING: 90 (min) PRODUCT F MARK: Not Suitable fo

Not Suitable for: Mounting on flammable materials /Covering with thermal

insulation

LAMP

LIGHT SOURCE:GU10MACADAM ELLIPSE:Not ApplicableMAXIMUM WATTAGE:50W MaxUGR:Not ApplicableMAXIMUM LAMP LENGTH:57 (mm)BEAM ANGLE:Lamp Dependant

LAMP INCLUDED? No **TILT ADJUSTMENT ANGLE:** Not Applicable **LUMINOUS FLUX:** Lamp Dependant **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: Lamp Dependant Lamp Dependant CRI: Lamp Dependant L70: Not Applicable

ELECTRICAL

R9:

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Lamp DependantDRIVER AVERAGE LIFESPAN:Not Applicable

Lamp Dependant


DRIVER OUTPUT CURRENT: Not Applicable EFFICACY: Lamp Dependant
DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? Not Applicable


ADDITIONAL INFORMATION

BOX QUANTITY x 24



CE

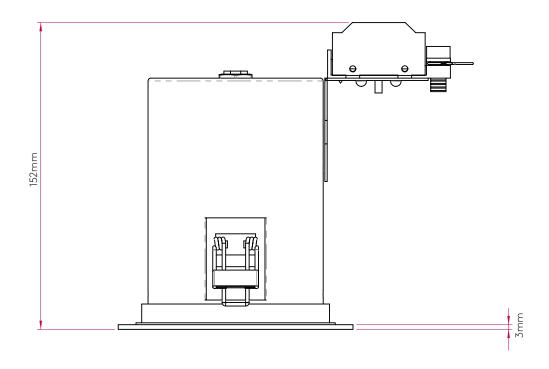

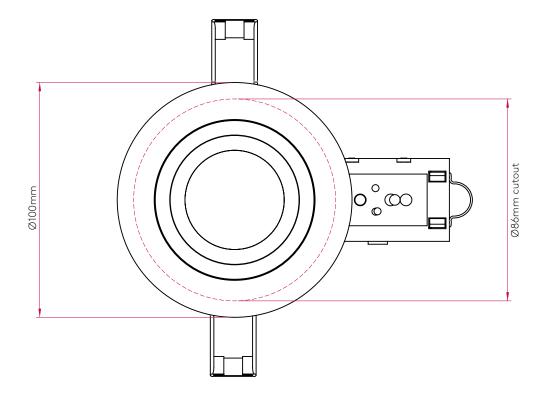

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com