



## PRODUCT SPECIFICATION

### GENERAL

<b>FINISH:</b>	Matt Nickel	<b>CABLE LENGTH:</b>	Not Applicable
<b>MAIN MATERIAL:</b>	Metal - Mild Steel	<b>GROSS WEIGHT:</b>	1.5 (kg)
<b>DIMENSIONS:</b>	H:229mm W:195mm D:135mm	<b>CLASS:</b>	CE (Class I)
<b>INSTALLATION ORIENTATION:</b>	Wall Mount - Horizontal	<b>IP RATING:</b>	IP20
<b>CUT OUT HOLE:</b>	Not Applicable	<b>BATHROOM ZONE:</b>	Zone 3
<b>RECESS DEPTH:</b>	Not Applicable	<b>VOLTAGE:</b>	Mains 230v
<b>FIRE RATING:</b>	Not Applicable	<b>PRODUCT F MARK:</b>	Suitable for mounting on flammable materials

### MAIN LAMP

<b>LIGHT SOURCE:</b>	E27/ES	<b>R9:</b>	Lamp Dependent
<b>MAXIMUM WATTAGE:</b>	1 x 60W Max	<b>MACADAM ELIPSE:</b>	Not Applicable
<b>MAXIMUM LAMP LENGTH:</b>	145mm	<b>UGR:</b>	Not Applicable
<b>LAMP INCLUDED?</b>	No	<b>BEAM ANGLE:</b>	Not Applicable
<b>LUMINOUS FLUX:</b>	Lamp Dependent	<b>AVERAGE LIFESPAN:</b>	Lamp Dependent
<b>COLOUR TEMP:</b>	Lamp Dependent	<b>L70:</b>	Not Applicable
<b>CRI:</b>	Lamp Dependent		


### ADDITIONAL LAMP

<b>LIGHT SOURCE:</b>	High Power LED	<b>MACADAM ELIPSE:</b>	3-Step
<b>MAXIMUM WATTAGE:</b>	1W	<b>UGR:</b>	Not Applicable
<b>LAMP INCLUDED?</b>	Yes (Integral)	<b>BEAM ANGLE:</b>	To Be Advised
<b>LUMINOUS FLUX:</b>	58 (lm)	<b>TILT ADJUSTMENT ANGLE:</b>	90 (Degrees)
<b>COLOUR TEMP:</b>	2700 (K)	<b>ROTATION ADJUSTMENT ANGLE:</b>	180 (Degrees)
<b>CRI:</b>	80	<b>AVERAGE LIFESPAN:</b>	60,000 (Hrs)
<b>R9:</b>	To Be Advised	<b>L70:</b>	To Be Advised

### ELECTRICAL

<b>SWITCHED:</b>	Yes	<b>DRIVER / BALLAST VOLTAGE:</b>	100-240 (V)
<b>DIMMABLE:</b>	No	<b>DRIVER AVERAGE LIFESPAN:</b>	30000 (Hrs)
<b>DIMMING METHOD:</b>	Not Applicable	<b>MAIN LAMP EFFICACY:</b>	Lamp Dependent
<b>DRIVER OUTPUT CURRENT:</b>	350 (mA)	<b>ADDITIONAL LAMP EFFICACY:</b>	To Be Advised
<b>DRIVER OUTPUT VOLTAGE:</b>	Not Applicable	<b>DRIVER INCLUDED?</b>	Yes (Integral)
<b>SUPPLY FREQUENCY:</b>	50/60 (Hz)		


# PRODUCT ELEVATIONS

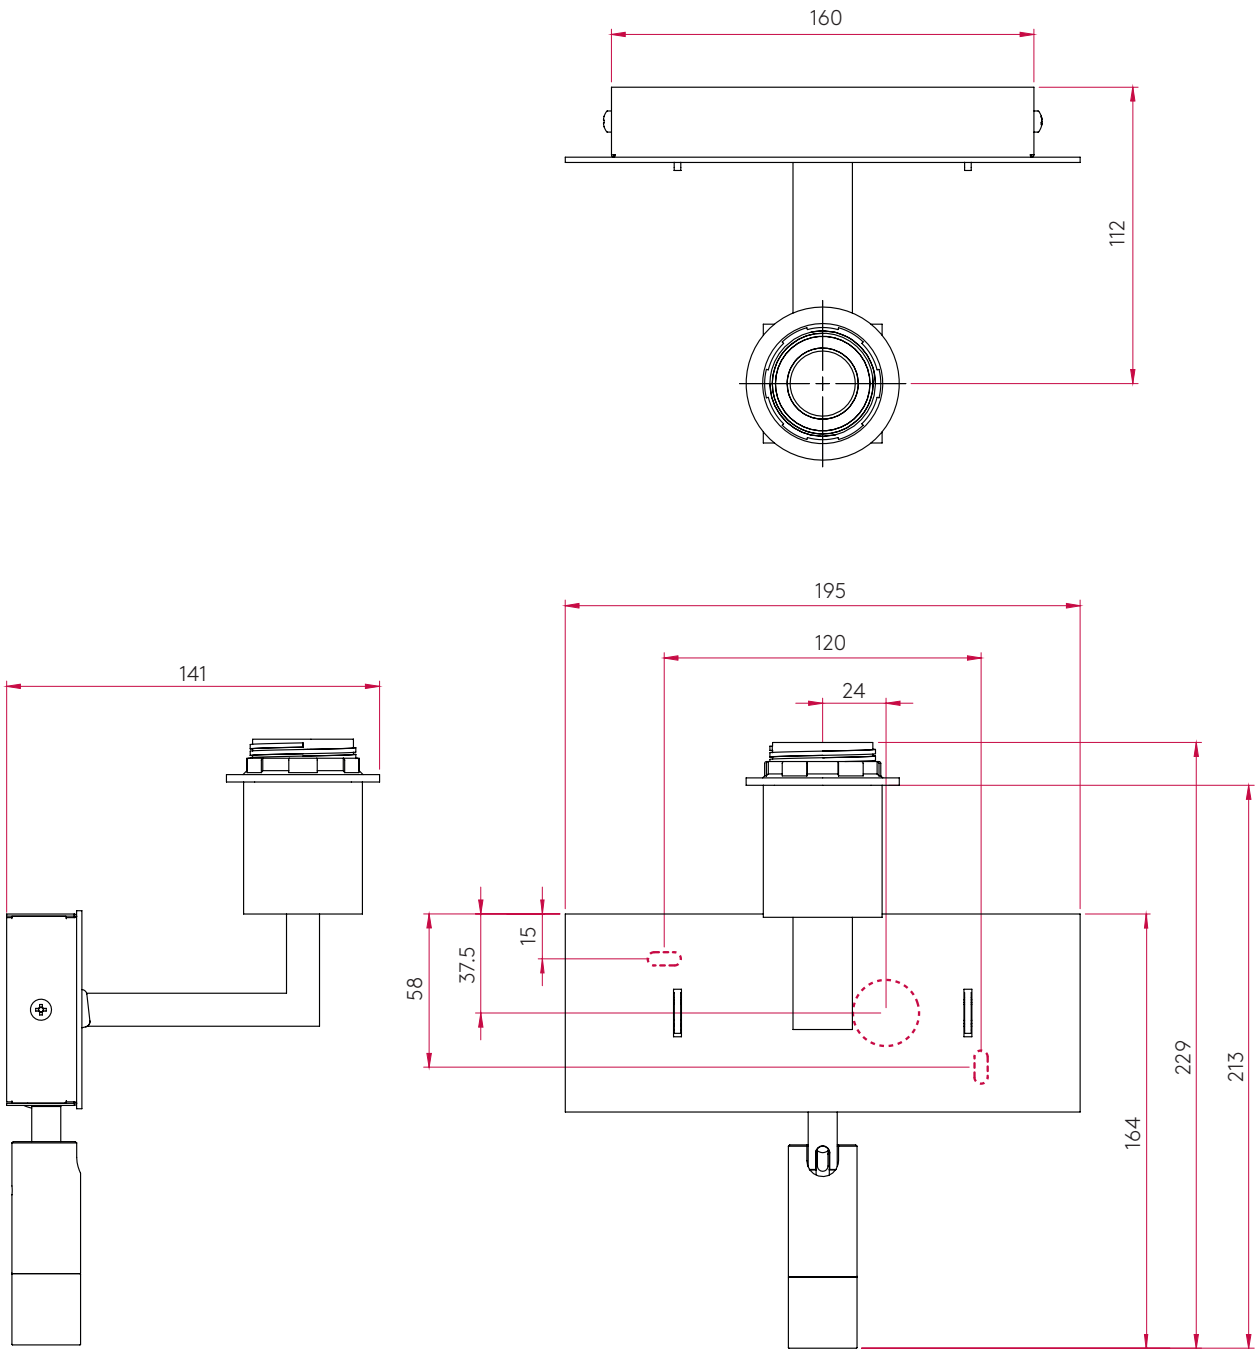

## ADDITIONAL INFORMATION



SHADE SOLD SEPARATELY



BOX QUANTITY X6