DARTMOUTH TWIN **7585** sku 1372005

Not Applicable

0.85 (kg)

IP54

CE (Class I)

Zone 1, 2, 3

Mains 230V

50/60 (Hz)

100-240 (V)

52 (lm/W)

Not Applicable

Yes (Integral)

Suitable for mounting on flammable materials



PRODUCT SPECIFICATION

GENERAL

FINISH: Painted Silver CABLE LENGTH: MAIN MATERIAL: Metal - Aluminium GROSS WEIGHT: H: 165mm W: 65mm D: 100mm DIMENSIONS: CLASS: INSTALLATION ORIENTATION: Wall Mount - Vertical **IP RATING:** CUT OUT HOLE: Not Applicable BATHROOM ZONE: **RECESS DEPTH:** Not Applicable VOLTAGE: FIRE RATING: Not Applicable PRODUCT F MARK:

LAMP

LIGHT SOURCE:	High-Power LED	MACADAM ELIPSE:	To Be Advised
MAXIMUM WATTAGE:	6W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	To Be Advised
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	Not Applicable
LUMINOUS FLUX:	355 (lm)	ROTATION ADJUSTMENT ANGLE:	Not Applicable
COLOUR TEMP:	3000 (K)	AVERAGE LIFESPAN:	60,500 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	-1.2		

ELECTRICAL

SWITCHED: DIMMABLE: DIMMING METHOD: DRIVER OUTPUT CURRENT: DRIVER OUTPUT VOLTAGE:

No Not Applicable 350 (mA) Not Applicable

No

ADDITIONAL INFORMATION



SUPPLY FREQUENCY:

DRIVER INCLUDED?

EFFICACY:

DRIVER/BALLAST VOLTAGE:


DRIVER AVERAGE LIFESPAN:


BOX QUANTITY X12

CE

(1) 1000 HOURS SALT-SPRAY TESTED

PRODUCT ELEVATIONS



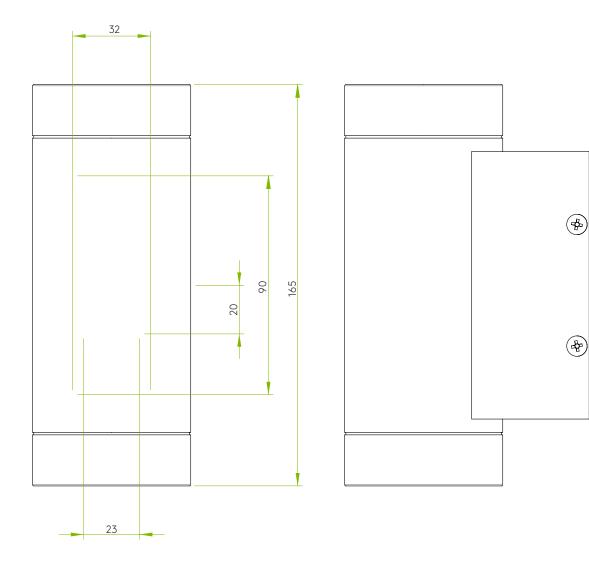

T: +44 (0) 1279 427001

F: +44 (0) 1279 427002

sales@astrolighting.com