DAKOTA 300 LED **7934** SKU 1129007

astro



PRODUCT SPECIFICATION

GENERAL

FINISH: Polished Chrome MAIN MATERIAL: Metal - Mild Steel DIA: 300mm D: 87mm **DIMENSIONS:**

INSTALLATION ORIENTATION: Ceiling Mount Not Applicable CUT OUT HOLE: **RECESS DEPTH:** Not Applicable

FIRE RATING: Not Applicable

CABLE LENGTH: Not applicable **GROSS WEIGHT:** 1.71 (Kg) CLASS: CE (Class II) IP RATING: IP44 **BATHROOM ZONE:** Zone 2, 3 **VOLTAGE:** Mains 230 (V)

PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE: LED Module MAXIMUM WATTAGE: 16W MAXIMUM LAMP LENGTH: To be advised LAMP INCLUDED? Yes (Integral) **LUMINOUS FLUX:** 771.47 (lm) COLOUR TEMP: 2700 (K) CRI: >80 R9: 5.7

MACADAM ELIPSE: 6 MacAdam UGR: Not Applicable **BEAM ANGLE:** Not Applicable TILT ADJUSTMENT ANGLE: Not Applicable **ROTATION ADJUSTMENT ANGLE:** Not Applicable AVERAGE LIFESPAN: 20,000 (Hrs) L70: To Be Advised


ELECTRICAL

SWITCHED: SUPPLY FREQUENCY: To Be Advised Not Applicable DIMMABLE: No DRIVER/BALLAST VOLTAGE: To Be Advised DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: To Be Advised **DRIVER OUTPUT CURRENT:** To Be Advised EFFICACY: 46.6 (lm/W) DRIVER OUTPUT VOLTAGE: To Be Advised DRIVER INCLUDED? Yes (Integral)

ADDITIONAL INFORMATION



CE

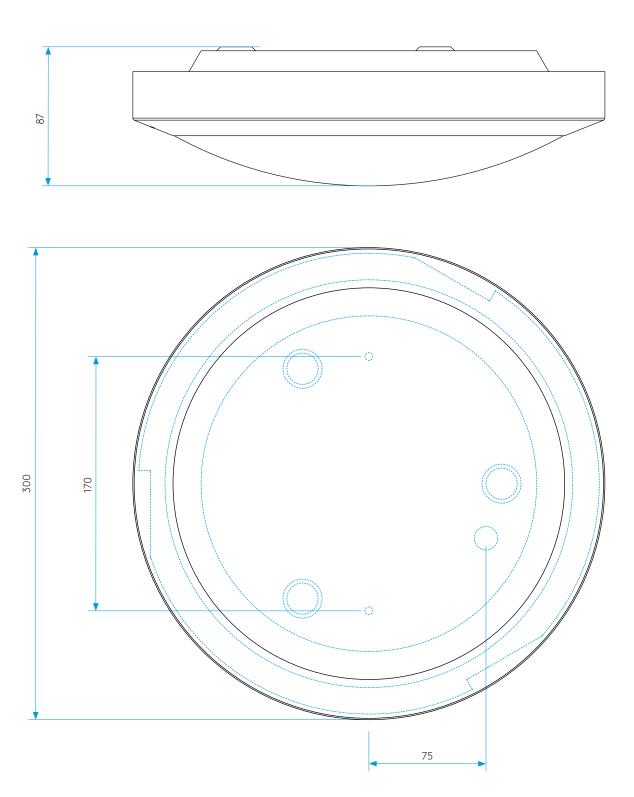

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com