astro





PRODUCT SPECIFICATION

GENERAL

FINISH: Polished Stainless Steel CABLE LENGTH:

MAIN MATERIAL: Metal - Zinc GROSS WEIGHT:

 MAIN MATERIAL:
 Metal - Zinc
 GROSS WEIGHT:
 0.19 (kg)

 DIMENSIONS:
 H: 70mm W: 70mm D: 2mm
 CLASS:
 CE (Class III)

INSTALLATION ORIENTATION: Wall Mount IP RATING: IP65

CUT OUT HOLE: 64mm/2.5" BATHROOM ZONE: Zone 1, 2, 3

RECESS DEPTH:26.5mm"VOLTAGE:Constant Current 350 (mA)FIRE RATING:Not ApplicablePRODUCT F MARK:Suitable for mounting

LAMP

LIGHT SOURCE:High Power LEDMACADAM ELIPSE:To Be AdvisedMAXIMUM WATTAGE:1WUGR:Not Applicable

Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 22.68 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) To Be Advised

CRI: 80 L70: R9:

ELECTRICAL

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Control Gear DependantDRIVER AVERAGE LIFESPAN:Not Applicable

DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable

DRIVER OUTPUT CURRENT: Not Applicable EFFICACY: 10.58 (Im/W)

DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? No

ADDITIONAL INFORMATION


BOX QUANTITY X12

Œ

Not Applicable

on flammable materials

To Be Advised

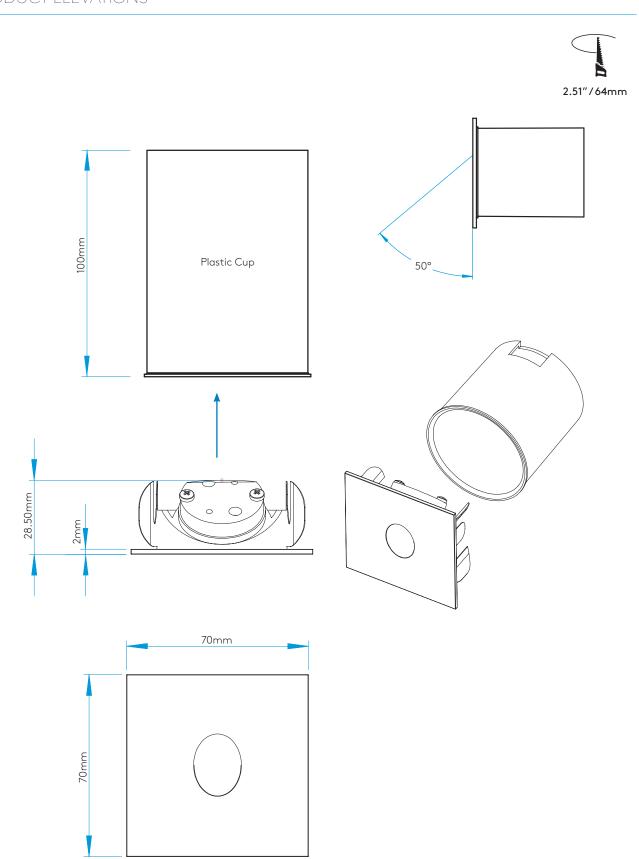

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com