
NIIMI SQUARE **0815** SKU 1163002

astro



PRODUCT SPECIFICATION

GENERAL

FINISH: Polished Chrome CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Zinc **GROSS WEIGHT:** 2.667 (kg) H 230mm W: 230mm D: 115-350mm **DIMENSIONS:** CLASS: CE (Class II) INSTALLATION ORIENTATION: Wall Mount - Horizontal IP RATING: IP44

CUT OUT HOLE: Not Applicable BATHROOM ZONE: Zone 2, 3

RECESS DEPTH: Not Applicable VOLTAGE: Mains 230V

FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE:per m LED stripMACADAM ELIPSE:6-StepMAXIMUM WATTAGE:0.395 x 14.4WUGR:Not Applicable

MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: 90 (Degrees) **LUMINOUS FLUX:** 144.85 (lm) **ROTATION ADJUSTMENT ANGLE:** 180 (Degrees) **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) Not Applicable

CRI: 65 **L70:** To Be Advised **R9:** 2.0

ELECTRICAL

SWITCHED: SUPPLY FREQUENCY: 50/60 (Hz) Yes DIMMABLE: No DRIVER/BALLAST VOLTAGE: 220-240 (V) 60,000 (Hrs) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: **DRIVER OUTPUT CURRENT:** Not Applicable EFFICACY: To Be Advised


DRIVER OUTPUT VOLTAGE: 12 (V) DRIVER INCLUDED? Yes (Integral)


ADDITIONAL INFORMATION



BOX QUANTITY X6

Œ

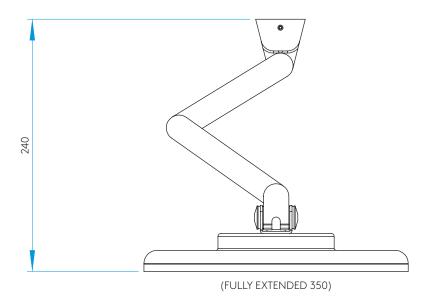

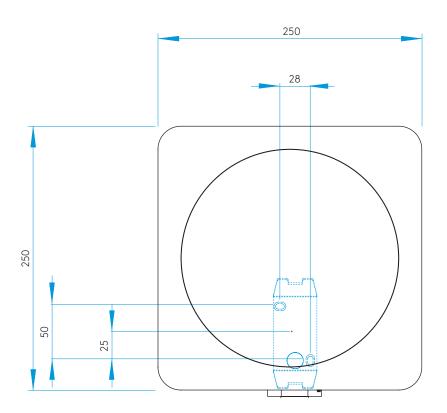

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com