VOID 80 **5776**

astro





PRODUCT SPECIFICATION

GENERAL

FINISH: White CABLE LENGTH: 1000mm MAIN MATERIAL: Metal - Aluminium **GROSS WEIGHT:** 1.026 (Kg) H:177mm DIA:146mm **DIMENSIONS:** CLASS: CE (Class III) INSTALLATION ORIENTATION: Install in to new ceiling IP RATING: IP65 95mm/3-3/4" **CUT OUT HOLE: BATHROOM ZONE:** Zone 1, 2, 3

RECESS DEPTH: 177mm VOLTAGE: Constant Current 250 (mA)
FIRE RATING: 90 min PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE: COB LED MACADAM ELLIPSE: 3-Step MAXIMUM WATTAGE: 9.1W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 14 (Degrees) LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 863 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 2700 (K) To Be Advised CRI: 80 L70: To Be Advised

ELECTRICAL

R9:

SWITCHED: SUPPLY FREQUENCY: No Not Applicable DIMMABLE: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable **EFFICACY:** 99.2 (lm/W)

DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? No

ADDITIONAL INFORMATION


9




BOX QUANTITY X8

CE



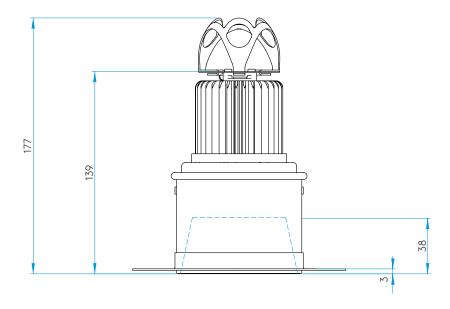

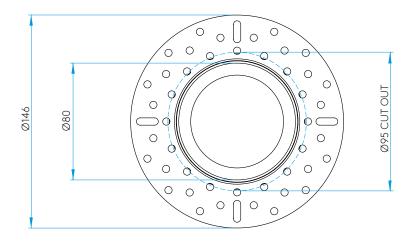

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com