VETRO TWIN 5748

astro

SKU 1254015



PRODUCT SPECIFICATION

GENERAL

 FINISH:
 Matt White
 CABLE LENGTH:
 450 (mm)

 MAIN MATERIAL:
 Metal - Aluminium
 GROSS WEIGHT:
 0.68 (Kg)

 DIMENSIONS:
 H: 175mm W: 90mm D: 80mm
 CLASS:
 CE (Class III)

INSTALLATION ORIENTATION: Ceiling Mount IP RATING: IP65

CUT OUT HOLE: L:160mm W: 80mm BATHROOM ZONE: Zone 1, 2, 3

RECESS DEPTH: 150 (mm) VOLTAGE: Constant Current 350 (mA)

FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE: COB LED MACADAM ELIPSE: 3-Step MAXIMUM WATTAGE: 2 x 6W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 20.2 (Degrees) LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 1231.6 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) 36,300 (Hrs) CRI: 80 L70: To Be Advised

R9: 15.0

ELECTRICAL


SWITCHED: SUPPLY FREQUENCY: No Not Applicable DIMMABLE: Yes DRIVER/BALLAST VOLTAGE: Not Applicable DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable **DRIVER OUTPUT CURRENT:** Not Applicable **EFFICACY:** 100.95 (Im/W) DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED? Not Applicable Not Applicable


ADDITIONAL INFORMATION

 ϵ



BOX QUANTITY x 20

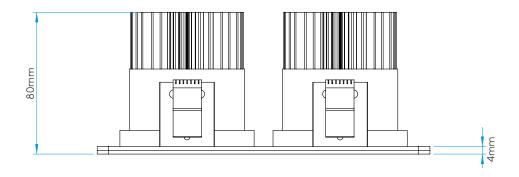

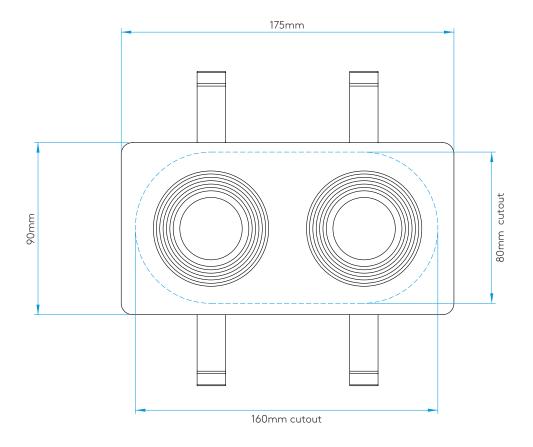

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com