
## TAKETA LED 7160

# astro

### SKU 1169007



#### PRODUCT SPECIFICATION

#### GENERAL

FINISH: Matt Nickel CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Aluminium **GROSS WEIGHT:** 3.15 (Kg) H: 300mm W: 300mm D: 75mm **DIMENSIONS:** CLASS: CE (Class II) INSTALLATION ORIENTATION: Wall Mount / Ceiling Mount IP RATING: IP44 **CUT OUT HOLE:** Not Applicable Zone 2, 3 **BATHROOM ZONE:** 

**RECESS DEPTH:** Not Applicable VOLTAGE: Mains 230V FIRE RATING: PRODUCT F MARK:

Not Applicable Suitable for mounting on flammable materials

LAMP

CRI:

LIGHT SOURCE: Mid-Power LED MACADAM ELIPSE: 3-Step

MAXIMUM WATTAGE: UGR: 17.8W Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 820 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) 60,000 (Hrs)

L70: R9: To Be Advised

**ELECTRICAL** 

SWITCHED: SUPPLY FREQUENCY: 50/60 (Hz) No DIMMABLE: No DRIVER/BALLAST VOLTAGE: 100-240 (V) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: 30,000 (Hrs) **DRIVER OUTPUT CURRENT:** EFFICACY:

350 (mA) 46.2 (lm/W) DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED? Not Applicable Yes (Integral)


#### ADDITIONAL INFORMATION



**BOX QUANTITY x 4** 

CE

60,000 (Hrs)

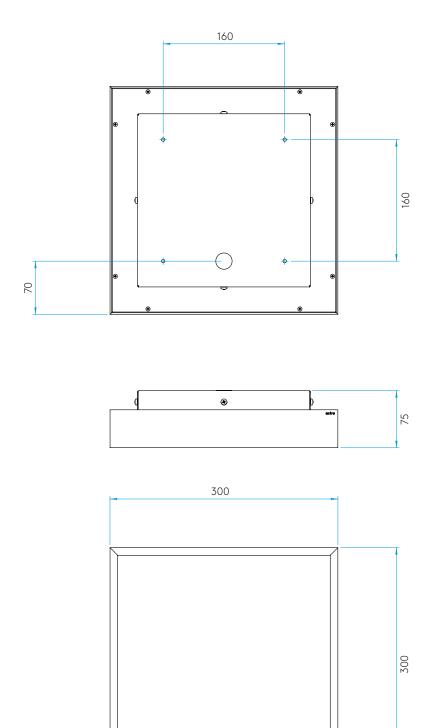

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com