
TAKETA LED 7932 SKU 1169010

astro



PRODUCT SPECIFICATION

GENERAL


FINISH: Polished Chrome CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Aluminium GROSS WEIGHT: 3.0 (Kg) H: 300mm W: 300mm D: 75mm DIMENSIONS: CLASS: CE (Class II) INSTALLATION ORIENTATION: Ceiling Mount **IP RATING:** IP44 CUT OUT HOLE: Not Applicable Zone 2, 3 BATHROOM ZONE: **RECESS DEPTH:** Not Applicable VOLTAGE: Mains 230V FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials LAMP LIGHT SOURCE: LED Module MACADAM ELIPSE: 6 MacAdam UGR: MAXIMUM WATTAGE: 16W Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 111 (Degrees) LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable LUMINOUS FLUX: 834 (lm) ROTATION ADJUSTMENT ANGLE: Not Applicable COLOUR TEMP: AVERAGE LIFESPAN: 2700 (K) 20,000 (Hrs) CRI: >80 L70: To Be Advised R9: 17 ELECTRICAL To Be Advised SWITCHED: SUPPLY FREQUENCY: Not Applicable DIMMABLE: No DRIVER / BALLAST VOLTAGE: To Be Advised DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: To Be Advised DRIVER OUTPUT CURRENT: To Be Advised EFFICACY: 51 (lm/W) DRIVER OUTPUT VOLTAGE: To Be Advised DRIVER/BALLAST INCLUDED? Yes (Integral) CE

ADDITIONAL INFORMATION



BOX QUANTITY x 4

PRODUCT ELEVATIONS

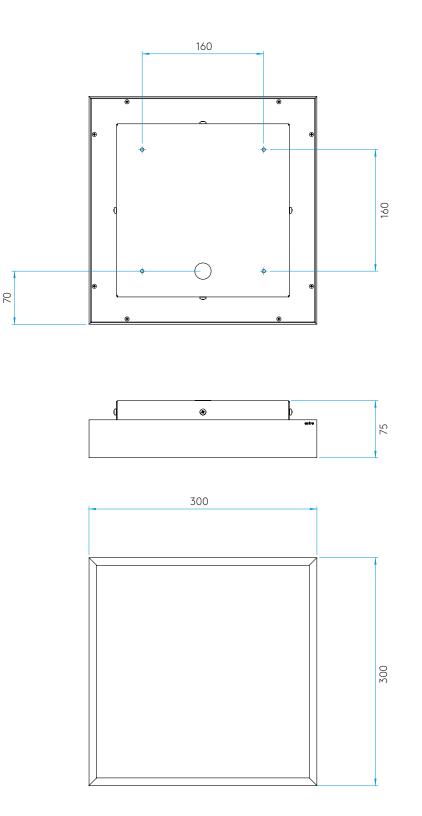

T: +44 (0) 1279 427001

sales@astrolighting.com

www.astrolighting.com