VETRO SQUARE **5755**

astro

SKU 1254017



PRODUCT SPECIFICATION

GENERAL

FINISH: Black CABLE LENGTH:

MAIN MATERIAL: Metal - Aluminium GROSS WEIGHT:

MAIN MATERIAL:Metal - AluminiumGROSS WEIGHT:0.386 (Kg)DIMENSIONS:H: 90mm W: 90mm D: 80mmCLASS:CE (Class III)

INSTALLATION ORIENTATION: Ceiling Mount IP RATING: IP65
CUT OUT HOLE: 79mm/3-1/8" BATHROOM ZONE: Zone 1, 2, 3

RECESS DEPTH: 150 (mm) VOLTAGE: Constant Current 350 (mA)
FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on

t Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE: COB LED MACADAM ELIPSE: 3-Step

MAXIMUM WATTAGE: 6W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 17.55 (Degrees) LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 629.3 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable

COLOUR TEMP: 3000 (K) AVERAGE LIFESPAN: 36,300 (Hrs)

CRI: 80 L70: To Be Advised

R9: 12.0

ELECTRICAL

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Control Gear DependantDRIVER AVERAGE LIFESPAN:Not Applicable

DRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:103.16 (lm/W)DRIVER OUTPUT VOLTAGE:Not ApplicableDRIVER/BALLAST INCLUDED?Not Applicable


ADDITIONAL INFORMATION




BOX QUANTITY x 50

Œ

450 (mm)

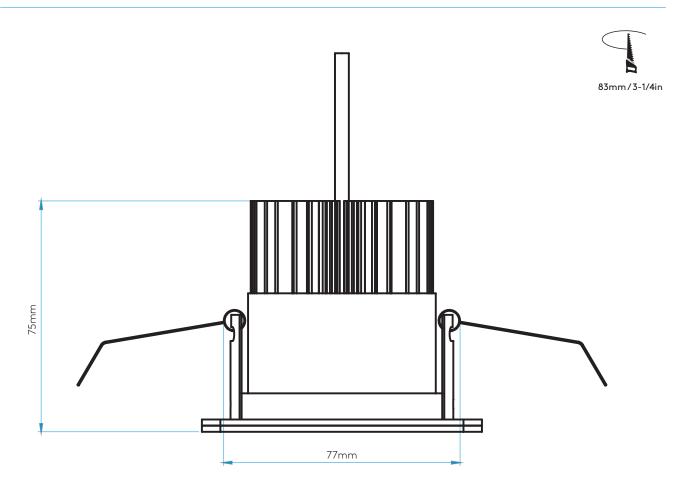

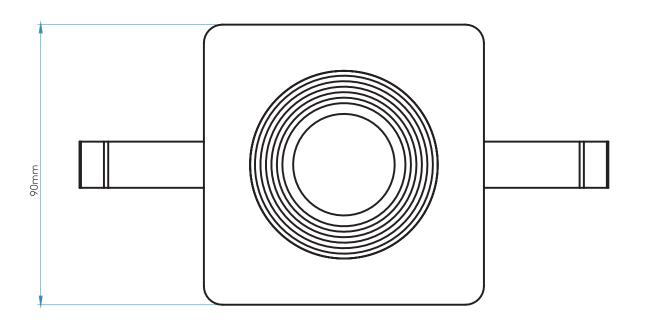

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com