KAMO LED 5708

astro

SKU 1236017



PRODUCT SPECIFICATION

GENERAL

FINISH: Polished Chrome CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Aluminium **GROSS WEIGHT:** 0.37 (Kg) D: 132mm DIA: 90mm DIMENSIONS: CLASS: CE (Class III) INSTALLATION ORIENTATION: Ceiling Mount IP RATING: IP65

CUT OUT HOLE: 70mm/2-3/4" BATHROOM ZONE: Zone 1, 2, 3

RECESS DEPTH: 150 (mm) VOLTAGE: Constant Current 250 (mA)

FIRE RATING: 90 (min) PRODUCT F MARK: Not Applicable

LAMP

LIGHT SOURCE: COB LED MACADAM ELLIPSE: 3-Step MAXIMUM WATTAGE: 10W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 44 (Degrees) LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 640 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable **COLOUR TEMP:** AVERAGE LIFESPAN: 3000 (K) 40,000 (Hrs)

CRI: 82 L70: R9: 3

ELECTRICAL

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Control Gear DependantDRIVER AVERAGE LIFESPAN:Not Applicable

DRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:58 (lm/W)DRIVER OUTPUT VOLTAGE:Not ApplicableDRIVER/BALLAST INCLUDED?No

ADDITIONAL INFORMATION

 ϵ


Product tested with 1874 - LED Driver CC 250mA 6.5-10W $\,$




BOX QUANTITY x 30

To Be Advised



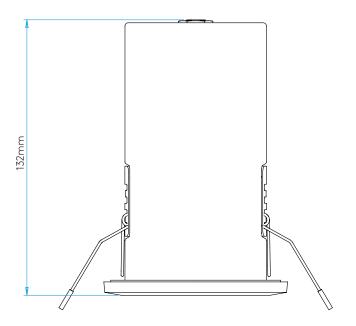

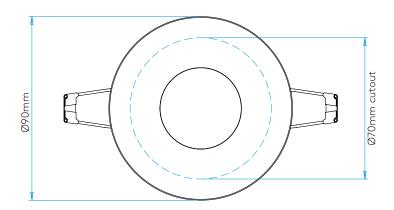

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com