

# OSAKA 350 LED

astro

## GENERAL

CLASS:	CE (Class 2)
IP RATING:	IP44
BATHROOM ZONE:	Zone 2, 3
VOLTAGE:	Mains 230V
INSTALLATION ORIENTATION:	Ceiling mount
MAIN MATERIAL:	Metal - mild steel
DIMENSIONS:	D: 109mm Ø: 350mm
CUT OUT HOLE:	Not applicable
RECESS DEPTH:	Not applicable
FIRE RATING:	Not applicable
CABLE LENGTH:	Not applicable
GROSS WEIGHT:	1.84Kg

## LAMP

LIGHT SOURCE:	LED STRIP
MAXIMUM WATTAGE:	22.41W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH:	Not applicable
LUMINOUS FLUX:	1315.55lm
COLOUR TEMP:	3000K
CRI:	80
R9:	16
MACADAM ELLIPSE:	7-Step
TILT ADJUSTABLE ANGLE:	Not applicable
ROTATION ADJUSTABLE ANGLE:	Not applicable
AVERAGE LIFESPAN:	To be advised
L70:	To be advised
BEAM ANGLE:	Not applicable

## ELECTRICAL

SWITCHED:	No
DIMMABLE:	No
DIMMING METHOD:	Not applicable
DRIVER INCLUDED:	Yes (Integral)
DRIVER OUTPUT CURRENT:	520mA
DRIVER OUTPUT VOLTAGE:	Not applicable
SUPPLY FREQUENCY:	50/60Hz
DRIVER/BALLAST VOLTAGE:	100-240V
DRIVER AVERAGE LIFESPAN:	Not applicable
EFFICACY:	58.7lm/W

## ADDITIONAL INFORMATION


SHADE INCLUDED:	Not applicable
SHADE MATERIAL:	Not applicable



CODE: 7412  
SKU: 1061006  
FINISH: POLISHED CHROME



CODE: 7414  
SKU: 1061008  
FINISH: MATT NICKEL

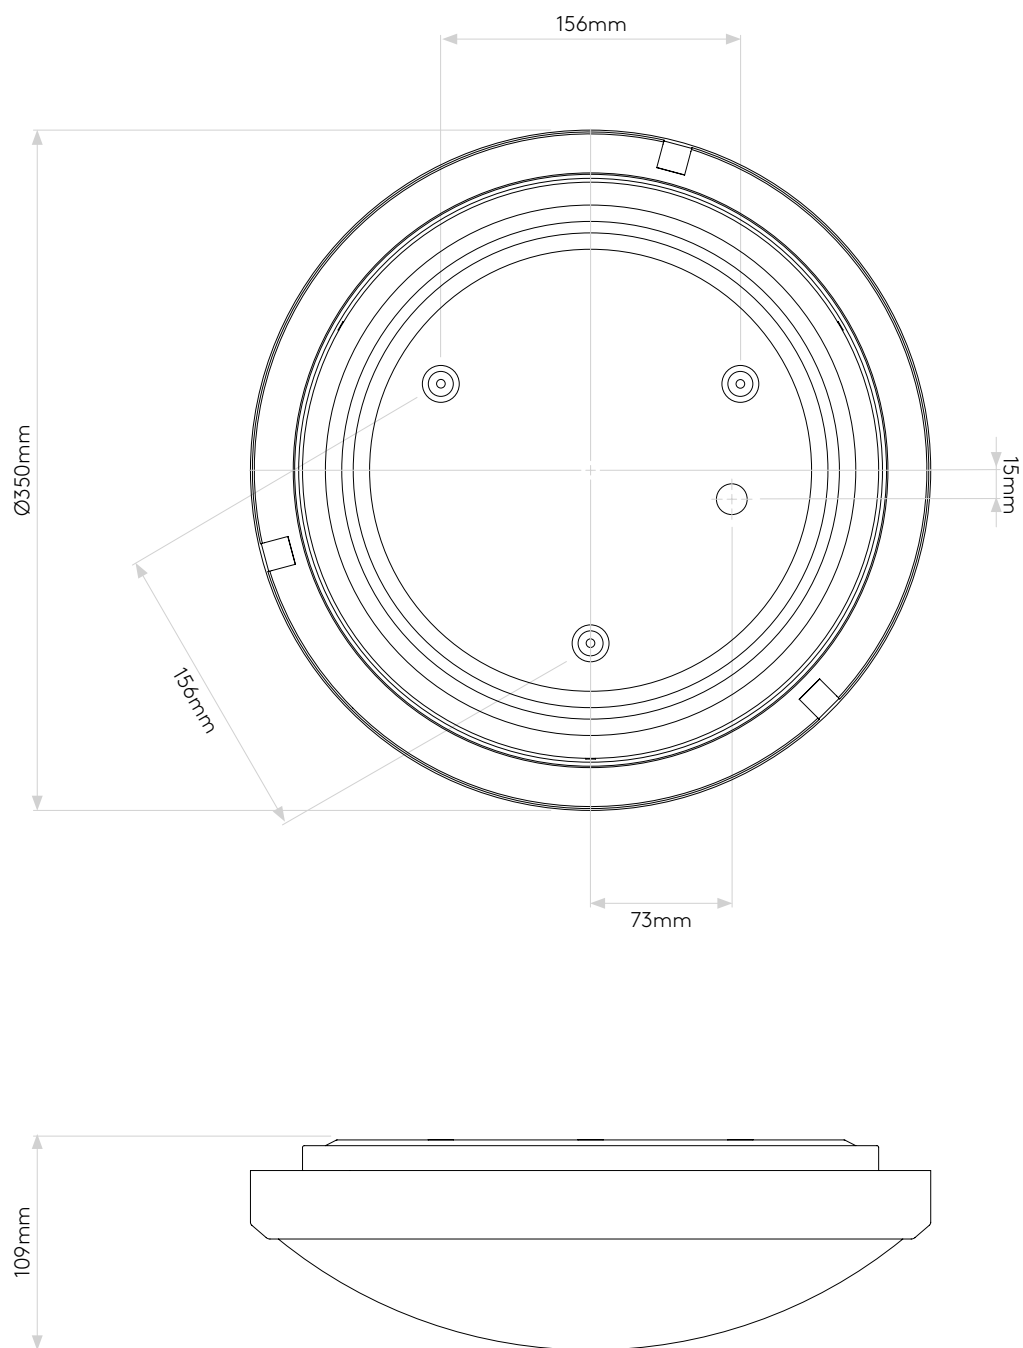

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.