
## VETRO SQUARE **5747**

# astro

### SKU 1254014



#### PRODUCT SPECIFICATION

#### GENERAL

FINISH: White

MAIN MATERIAL:Metal - AluminiumGROSS WEIGHT:

DIMENSIONS: H: 90mm W: 90mm D: 80mm CLASS: CE (Class III)

INSTALLATION ORIENTATION:Ceiling MountIP RATING:IP65CUT OUT HOLE:79mm/3-1/8"BATHROOM ZONE:Zone 1, 2, 3

RECESS DEPTH: 150 (mm) VOLTAGE: Constant Current 350 (mA)

FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

CABLE LENGTH:

LAMP

LIGHT SOURCE: COB LED MACADAM ELIPSE: 3-Step

MAXIMUM WATTAGE: 6W UGR: To Be Advised MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** 17.55 (Degrees) LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **LUMINOUS FLUX:** 629.3 (lm) **ROTATION ADJUSTMENT ANGLE:** Not Applicable COLOUR TEMP: AVERAGE LIFESPAN: 3000 (K) 36,300 (Hrs)

CRI: 80 L70: R9: 12.0

ELECTRICAL

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Control Gear DependantDRIVER AVERAGE LIFESPAN:Not Applicable

DIMMING METHOD: Control Gear Dependant DRIVER AVERAGE LIFESPAN: Not Applicable

DRIVER OUTPUT CURRENT: Not Applicable EFFICACY: 103.16 (Im/W)

DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? No

#### ADDITIONAL INFORMATION

C€


Not Applicable


To Be Advised

0.38 (Kg)



BOX QUANTITY x 50

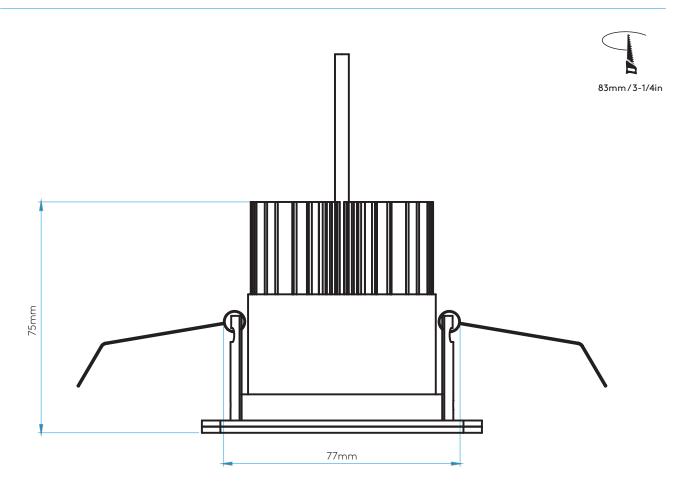

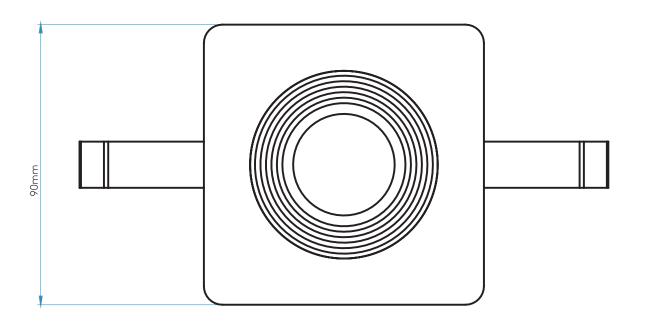

T: +44 (0) 1279 427001 sales@astrolighting.com www.astrolighting.com